


# ULTRA PROOF

## Breathing Micro Water Repellent

An Ultra Low Disturbance  
Building Solution

“Like Water off a Duck’s Back”

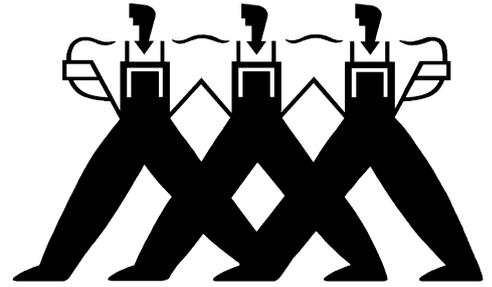

**ULTRA PROOF** is a water based surface treatment liquid for indoor and outdoor treatment of masonry, timber, roof, wall and drive surfaces. It contains a breathing water repellent and mould inhibitor. It is suitable for application to all types of masonry and timber, where resistance to water penetration and staining is required.

### Special features

- Solvent free
- Water based
- Apply to dry or damp surfaces
- Micro porous
- Layer forming
- Resists chemical attack
- Apply to old or new masonry

## DESCRIPTION

**ULTRA PROOF** contains an acrylic polymer emulsion. This solution can be used as a surface treatment on masonry and timber at an application rate of 4 square metres per litre, to provide a water repellent layer, which allows water vapour to escape from the surface, but prevents liquid water from penetrating.

## TECHNICAL DATA

### Active Substance

Acrylic polymer emulsion

### Corrosion

No action

### Aggressivity to other materials

No known aggressivity

### Adhesive/paint application

Masonry and timber surfaces can be painted over Ultra Proof. Wood impregnated with ULTRA PROOF can be glued when dry. Can be used as a primer, to reduce paint absorption, or over paint to improve coating life.

### Suitable surfaces

Stone, including sandstones & limestones, brick, concrete, slate, render, sand and cement and wood.

## USES

As a surface treatment by brush, roller or spray to **prevent** rainwater penetration and to provide a 'sealed' surface. Inhibits dusting and 'spalling' due to weathering. Suitable as a consolidator for friable surfaces and as a primer-sealer, prior to plastering or painting. Can be used on roof slates, shingles and tiles to inhibit growth of algae. Can be applied immediately to new pointing and masonry. Can be applied to damp surfaces.

## PREPARATION

Clean off all debris and surface contamination. For surfaces covered in moss, algae or moulds, apply PRS Mould Cleaner. Cover and isolate adjacent areas not requiring treatment, including pathways, lawns, vegetation and vehicles. Mask any glass or plastic. Apply two coats to refusal. Allow the surfaces to dry between coats.

**Property Repair Systems - 01626 331351**  
**Unit 3, Olympus Business Park, TQ12 2SN**  
DCM – 11/12